


Double Piston - Normally Closed Offset Valve

Operating pressure:	0 - 1500 bar
Media Temperature:	-40°C to + 200°C
Ambient Temperature:	-20°C to + 100°C
Material gasket valve:	PTFE
Material actuator:	AW6026
Material body:	AISI316L
Connections:	Cone & thread
Compliance:	PED (2014/68/EC)
	Machinery Directive (2006/42/EC)
	ATEX (2014/32/EC) [Ex II 2G]
Type:	Normally Closed
Connection	Offset Valve

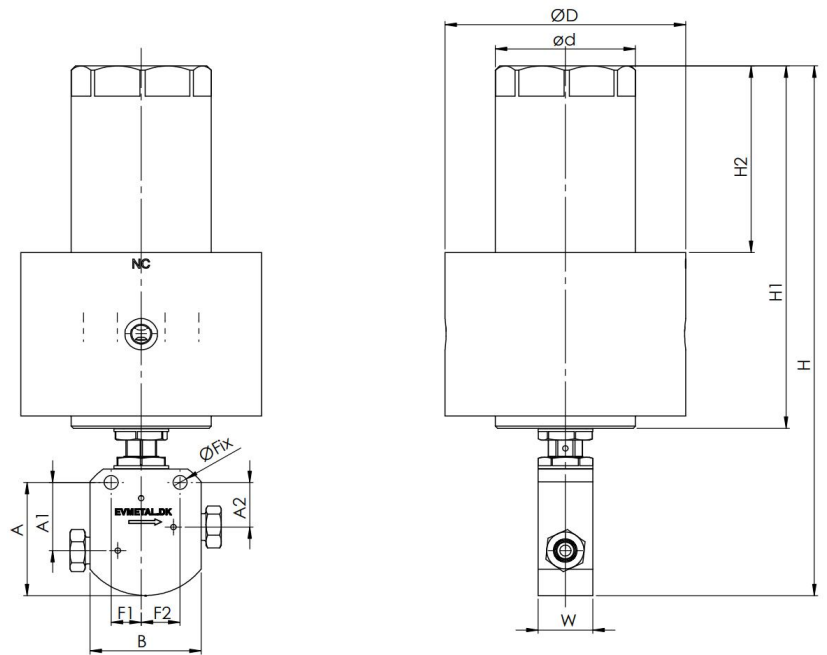

Catalogue number	A [mm]	A1 [mm]	A2 [mm]	ØFIX [mm]	B [mm]	F1 [mm]	F2 [mm]	ØD [mm]	ød [mm]	H [mm]	H1 [mm]	H2 [mm]	W [mm]	Operating pressure [Bar]
915201-D1 3/8 ACT NC	52,5	31,6	20,7	6,4	50,8	13,7	17,8	110	64	237	163	87	25	1050
905201-D1 3/8 ACT NC	52,5	31,6	20,7	6,4	50,8	13,7	17,8	110	64	237	163	87	25	1500
975201-D1 9/16 ACT NC	66	38	22	6,4	63,6	16,5	16,5	110	64	255	163	87	32	750
905201-D1 9/16 ACT NC	66	38	22	6,4	63,6	16,5	16,5	190	89	416	321	154	32	1500
915201-D1 3/4 ACT NC	78	45	26,7	11	76	24,0	20,7	190	89	518	388	221	40	1050