


CHECK VALVE WITH BALL

EV METALVÆRK
EV HYDROGEN®

Operating pressure:	1500 bar/21.500 psi
Temperature:	-60°C to +200°C
Crack pressure:	2 bar/29 psi
Material body:	AISI316L
Material internal parts:	AISI316L
Spring:	AISI316
Ball:	AISI316
Connections:	Cone and Thread connection
Tests:	EN10266-1 P10, 2250 bar water
Seat tightness test:	EN10266-1 P12, 1650 bar water
Certification:	PED (2014/68/EU)

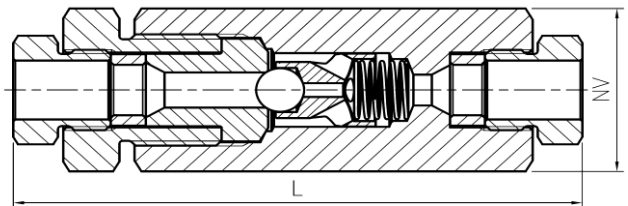

Catalogue number	SIZE		NV		L		Kv-value
901021-62 1/4	1/4"		22		75		0,26
901021-62 3/8	3/8"		27		86		0,54
901021-62 9/16	9/16"		36		109		2,1
901021-62 3/4	3/4"		50		140		4,1