


# MP needle valve 1500 bar OFF SET

# EV METALVÆRK

## EV HYDROGEN®

Operating pressure:	1500 bar/21.500 psi
Temperature:	-60°C to +200°C
Material body:	AISI316L
Material spindel:	17-4 PH
Material internal parts:	AISI316L
Material top:	CW307G
Material GASKET:	PTFE + PEEK
Connections:	Cone and Thread connection
Tests:	EN10266-1 P10, 2250 bar water
Seat tightness test:	EN10266-1 P12, 1650 bar water
Certification:	PED (2014/68/EU)

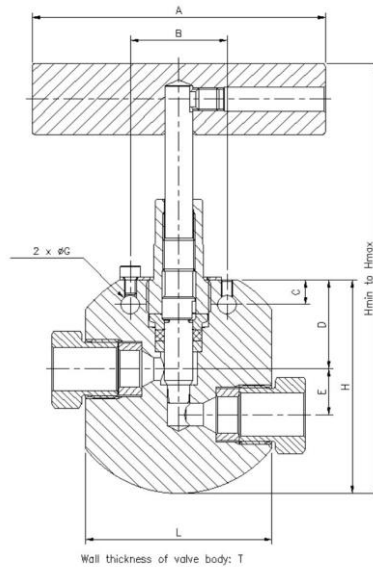

Catalogue number	Stem	SIZE	A	B	C	D	E	H	H <sub>max</sub>	T	L	Kv <sub>max</sub>
905201-8 1/4	Regulating	1/4"	75	35	9,5	28,5	9,5	59,5	122	25	50,8	0,19
905201-18 1/4	On/off	1/4"	75	35	9,5	28,5	9,5	59,5	122	25	50,8	0,19
905201-8 3/8	Regulating	3/8"	75	31,5	6,2	26,9	10,9	58,7	122	25	50,8	0,54
905201-18 3/8	On/off	3/8"	75	31,5	6,2	26,9	10,9	58,7	122	25	50,8	0,55
905201-8 9/16	Regulating	9/16"	100	33	8,5	30,5	16	74	160	32	63,5	1,05
905201-18 9/16	On/off	9/16"	100	33	8,5	30,5	16	74	160	32	63,5	1,18
905201-8 3/4	Regulating	3/4"	175	44,7	16	42,7	18,8	90	202	40	76	2,21
905201-18 3/4	On/off	3/4"	175	44,7	16	42,7	18,8	90	202	40	76	2,22